

Assembly instructions for Legstoppers®

Fig. 1

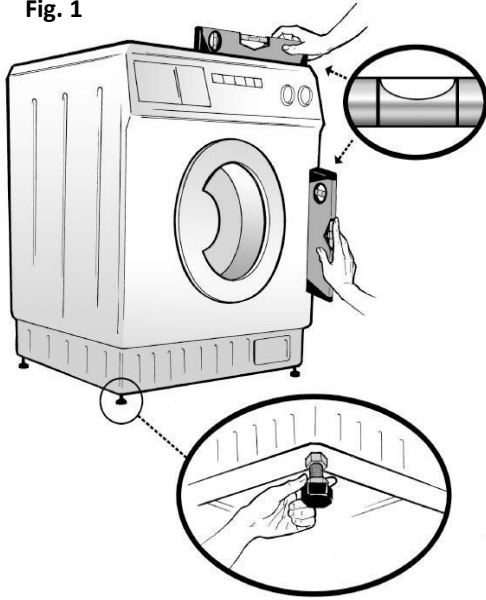


Fig. 2


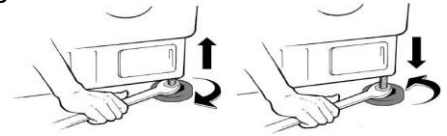


Fig. 2

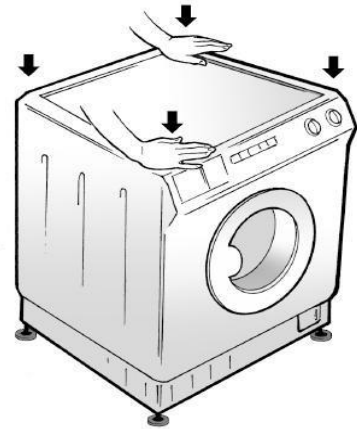

Step 1 - Machine location - Fig. 1

The floor must be clean, grease-free and dry before installing Legstoppers®. Adjust the feet of the machine if the floor is skewed (do not place wooden pieces or similar under the feet). Check with leveler that the washing machine is leveled. When the machine is leveled, tighten the locking nuts on the machine's feet

Step 2 - Adjusting the machine's legs - Fig. 2

Place Legstoppers® under each of the four legs. If necessary, adjust the machine's feet according to the factory installation instructions.

Step 3 - Diagonal Check - Fig. 3

When the top plate of the washing machine is pressed diagonally, the machine should not move up or down at all. (Check both directions). If the machine does not stand steady, the feet must be adjusted again.

NB! Legstoppers® should be mounted with the text WWW.LEGSTOPPERS.COM up against the machine.

To install Legstoppers® under a dryer on top of a washing machine, follow the same instructions as described above.

Senas AS is not responsible for personal, mechanical or physical damage that may occur during installation or use of Legstoppers® - or if Legstoppers® is used incorrectly, or for purposes other than intended use. Always follow the installation instructions for your washer or dryer. If you have questions about mounting, contact us at www.legstoppers.com or info@legstoppers.com